

QUASIVELOCITIES AND OPTIMAL CONTROL FOR UNDERACTUATED MECHANICAL SYSTEMS

LEONARDO COLOMBO AND DAVID MARTÍN DE DIEGO

ABSTRACT. This paper is concerned with the application of the theory of quasivelocities for optimal control for underactuated mechanical systems. Using this theory, we convert the original problem in a variational second-order lagrangian system subjected to constraints. The equations of motion are geometrically derived using an adaptation of the classical Skinner and Rusk formalism.

1. INTRODUCTION

The mathematical activity in the last century in dynamical systems, mechanics and related areas has been recently extended to the control and optimal control of mechanical systems. In particular, there are an increasing interest in the control of underactuated mechanical systems (see [3, 5] and references therein). These type of mechanical systems are characterized by the fact that there are more degrees of freedom than actuators, being their qualitative behavior quite different than fully actuated control systems.

Geometrically, quasivelocities are the components of velocities, describing a mechanical system, relative to a set of vector fields (in principle, local) that span on each point the fibers of the tangent bundle of the configuration space. The main point is that these vector fields need not be associated with (local) configuration coordinates on the configuration space. In this paper we will use quasivelocities as a tool for describing optimal control problem for underactuated mechanical systems.

The paper is organized as follows. In Section 2 we describe the concept of quasivelocities from a geometric point of view and we introduce the Euler-Lagrange equations on quasivelocities (called Hamel equations). In section 3 we describe the conditions of optimality for optimal control problem using the Skinner and Rusk formulation [10, 1].

2. QUASIVELOCITIES

Let Q be a n dimensional differentiable manifold, and $L : TQ \rightarrow \mathbb{R}$ a Lagrangian function determining the dynamics. Let (q^A) , $1 \leq A \leq n$, be local coordinates on Q and choose a local basis of vector fields X_B with $1 \leq B \leq n$, defined in the same coordinate neighborhood. The components of X_B relative to the standard basis $\frac{\partial}{\partial q^A}$ will be denoted X_B^A , that is $X_B = X_B^A(q) \frac{\partial}{\partial q^A}$.

Let $(y^1, \dots, y^n)$ (the **quasivelocities**) be the components of a velocity vector v on TQ relative to the basis X_B , then

$$v = y^B X_B(q) = y^B X_B^A(q) \frac{\partial}{\partial q^A}.$$

Therefore, $\dot{q}^A = y^B X_B^A(q)$, then

$$L(q, \dot{q}) = L(q, y^B X_B^A(q)) := l(q, y).$$

On TQ we have induced coordinates $\{(q^A, y^A) \mid A = 1, \dots, n\}$.

The Lie bracket of the vector fields X_A is $[X_A, X_B] = \mathcal{C}_{AB}^D X_D$, where $\mathcal{C}_{AB}^D$ are called *Hamel's transpositional symbols or structure coefficients*.

Given a Lagrangian function $L : TQ \rightarrow \mathbb{R}$, the *Euler-Lagrange equations in quasivelocities or Hamel equations* are

$$\begin{aligned}\dot{q}^A &= y^B X_B^A(q) \\ \frac{d}{dt} \left(\frac{\partial l}{\partial y^A} \right) &= \frac{\partial l}{\partial q^B} X_B^A - \mathcal{C}_{AB}^D y^B \frac{\partial l}{\partial y^D}\end{aligned}$$

These equations were introduced by [7] (see also [9]). It is interesting to note that these equations admit a nice, useful and intrinsic interpretation in terms of mechanics on Lie algebroids (see [8]).

3. OPTIMAL CONTROL FOR UNDERACTUATED MECHANICAL SYSTEMS

We recall that a Lagrangian Control System is *underactuated* if the numbers of the control inputs is less than the dimension of the configuration space. We assume, in the sequel, that the system is controllable [2].

Consider a lagrangian function $L : TQ \rightarrow \mathbb{R}$. Adding external forces and controlled forces we have that the equations of motion are:

$$\frac{d}{dt} \left(\frac{\partial L}{\partial \dot{q}^A} \right) - \frac{\partial L}{\partial q^A} = F_A + u_a \bar{X}_A^a$$

where $F = F^A(q, \dot{q}) dq^A$ represents given external forces and $\bar{X}^a = \bar{X}_A^a(q) dq^A$, $1 \leq a \leq m < n$, the control forces.

Complete with independent 1-forms $\bar{X}^\alpha$ to obtain a local basis $\{\bar{X}^a, \bar{X}^\alpha\}$ of $\Lambda^1 Q$ and take its dual basis that we denote by $\{X_a, X_\alpha\}$. Now, considering the quasivelocities induced by the local basis $\{X_a, X_\alpha\}$, the **control equations** are written as

$$\begin{aligned}\dot{q}^A &= y^B X_B^A(q) \\ \frac{d}{dt} \left(\frac{\partial l}{\partial y^a} \right) - \frac{\partial l}{\partial q^B} X_a^B + \mathcal{C}_{aB}^D y^B \frac{\partial l}{\partial y^D} &= F_A X_a^A + u_a, \\ \frac{d}{dt} \left(\frac{\partial l}{\partial y^\alpha} \right) - \frac{\partial l}{\partial q^B} X_\alpha^B + \mathcal{C}_{\alpha B}^D y^B \frac{\partial l}{\partial y^D} &= F_A X_\alpha^A.\end{aligned}$$

where $1 \leq a \leq m$, $m+1 \leq \alpha \leq n$, and $u(t) = (u_1(t), \dots, u_m(t)) \in U$ where U is an open subset of $\mathbb{R}^m$ containing $\mathbf{0}$.

For solving an optimal control problem we need to find a trajectory $(q^A(t), u^a(t))$ (called an optimal curve) of the configuration variables and control inputs satisfying the control equations from given initial and final conditions: $(q^A(t_0), y^A(t_0))$, $(q^A(t_f), y^A(t_f))$ and minimizing the cost functional

$$\mathcal{A} = \int_{t_0}^{t_f} C(q^A(t), y^A(t), u^a(t)) dt.$$

For other hand, a second order variational Lagrangian problem with constraints is given by

$$\min_{q(\cdot)} \int_0^T L(q^A, \dot{q}^A, \ddot{q}^A) dt$$

subject to the constraints

$$\Phi(q^A, \dot{q}^A, \ddot{q}^A) = 0.$$

In the sequel we will show the equivalence of both theories (optimal control for underactuated systems and second order variational problems with constraints) under some regularity conditions (see [2] and references therein). Indeed, our initial optimal control problem is equivalent to the following constrained variational problem

$$\text{Minimize } \bar{\mathcal{A}} = \int_{t_0}^{t_f} \tilde{L}(q^A(t), y^A(t), \dot{y}^A(t)) dt$$

subject to constraints

$$\Phi^\alpha(q^A, y^A, \dot{y}^A) = \frac{d}{dt} \left(\frac{\partial l}{\partial y^\alpha} \right) - \frac{\partial l}{\partial q^B} X_\alpha^B + \mathbb{C}_{\alpha B}^D y^B \frac{\partial l}{\partial y^D} - F_A X_\alpha^A = 0,$$

and where $\tilde{L}$ is defined as

$$\tilde{L}(q^A, y^A, \dot{y}^A) = C \left(q^A, y^A, \frac{d}{dt} \left(\frac{\partial l}{\partial y^a} \right) - \frac{\partial l}{\partial q^B} X_a^B + \mathbb{C}_{aB}^D y^B \frac{\partial l}{\partial y^D} - F_A X_a^A \right).$$

More, geometrically, we have that $(q^A, y^A, \dot{y}^A)$ are coordinates on $T^{(2)}Q$ (the second order tangent bundle) and the constraints Φ^α determine a submanifold $\mathcal{M}$ of $T^{(2)}Q$ and $\tilde{L} : T^{(2)}Q \rightarrow \mathbb{R}$.

The canonical immersion $j_2 : T^{(2)}Q \rightarrow T(TQ)$ in the induced coordinates $(q^A, y^A, \dot{y}^A)$ is

$$\begin{array}{ccc} T^{(2)}Q & \xrightarrow{j_2} & TTQ \\ (q^A, y^A, \dot{y}^A) & \mapsto & (q^A, y^A, X_B^A y^B, \dot{y}^A) \end{array}$$

Assume that the matrix $\left(\frac{\partial^2 l}{\partial y^\alpha \partial y^\beta} \right)_{m+1 \leq \alpha, \beta \leq n}$ is regular, then we can rewrite the constraints in the form $\dot{y}^\beta = G^\alpha(q^A, y^A, \dot{y}^a)$ and select coordinates $(q^A, y^A, \dot{y}^a)$ on $\mathcal{M}$.

Hence, $(j_2)|_{\mathcal{M}} : \mathcal{M} \rightarrow T(TQ)$ is

$$\begin{array}{ccc} \mathcal{M} & \xrightarrow{(j_2)|_{\mathcal{M}}} & TTQ \\ (q^A, y^A, \dot{y}^a) & \mapsto & (q^A, y^A, X_B^A y^B, \dot{y}^a, G^\alpha(q^A, y^A, \dot{y}^a)) \end{array}$$

Let us define $\tilde{L}_{\mathcal{M}}$ by $\tilde{L}_{\mathcal{M}} = \tilde{L}|_{\mathcal{M}} : \mathcal{M} \rightarrow \mathbb{R}$ and consider $W_0 = \mathcal{M} \times_{TQ} T^*TQ$ with induced coordinates $(q^A, y^A, \dot{y}^a, p_A, \tilde{p}_A)$.

Now, we will describe geometrically the problem based on the Skinner and Rusk formalism (see [10]).

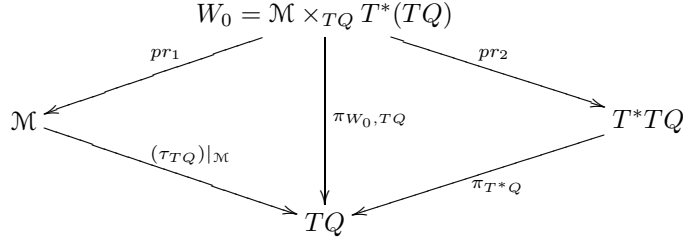


FIGURE 1. Skinner and Rusk Formalism

Let us define the 2-form $\Omega = pr_2^*(\omega_{TQ})$ on W_0 , where ω_{TQ} is the canonical symplectic form on T^*TQ , and $\tilde{H}(v_x, \alpha_x) = \langle \alpha_x, (j_2)|_{\mathcal{M}}(v_x) \rangle - \tilde{L}_{\mathcal{M}}(v_x)$ where $x \in TQ$, $v_x \in \mathcal{M}_x \cap (\tau_{TQ}|_{\mathcal{M}})^{-1}(x)$ and $\alpha_x \in T_x^*TQ$.

In coordinates

$$\begin{aligned} \Omega &= dq^A \wedge dp_A + dy^A \wedge d\tilde{p}_A, \\ \tilde{H} &= p_A X_B^A(q) y^B + \tilde{p}_a \dot{y}^a + \tilde{p}_\alpha G^\alpha(q^A, y^A, \dot{y}^a) - \tilde{L}_{\mathcal{M}}(q^A, y^A, \dot{y}^a). \end{aligned}$$

The intrinsic expression of this constrained problem is given by the following presymplectic equation

$$i_X \Omega = d\tilde{H}. \quad (3.1)$$

Observe that $\ker \Omega = \text{span} \left\langle \frac{\partial}{\partial \dot{y}^a} \right\rangle$.

Following the Gotay-Nester-Hinds algorithm [6] for presymplectic hamiltonian systems we obtain the primary constraints $d\tilde{H}\left(\frac{\partial}{\partial \dot{y}^a}\right) = 0$, that is

$$\varphi_a = \frac{\partial \tilde{H}}{\partial \dot{y}^a} = \tilde{p}_a + \tilde{p}_\alpha \frac{\partial G^\alpha}{\partial \dot{y}^a} - \frac{\partial \tilde{L}_M}{\partial \dot{y}^a} = 0.$$

Therefore the dynamics is restricted to the manifold W_1 determined by the vanishing of the constraints $\varphi_a = 0$. Observe that $\dim W_1 = 4n$ with induced coordinates $(q^A, y^A, \dot{y}^a, p_A, \tilde{p}_\alpha)$.

A curve $t \rightarrow (q^A(t), y^A(t), \dot{y}^a(t), p_A(t), \tilde{p}_\alpha(t))$ solution of the equations (3.1) must verify the following system of differential-algebraic equations.

$$\frac{dq^A}{dt} = X_B^A(q(t))y^B(t) \quad (3.2)$$

$$\frac{dy^a}{dt} = G^\alpha(q^A(t), y^A(t), \frac{dy^a}{dt}(t)), \quad \frac{dy^a}{dt} = \dot{y}^a(t) \quad (3.3)$$

$$\begin{aligned} \frac{dp_A}{dt} = & -p_C(t) \frac{\partial X_B^C}{\partial q^A}(q(t))y^B(t) - \tilde{p}_\alpha(t) \frac{\partial G^\alpha}{\partial q^A}(q^B(t), y^B(t), \dot{y}^b) \\ & + \frac{\partial \tilde{L}_M}{\partial q^A}(q^B(t), y^B(t), \dot{y}^b) \end{aligned} \quad (3.4)$$

$$\begin{aligned} \frac{d\tilde{p}_A}{dt} = & -p_C(t) X_A^C(q(t)) - \tilde{p}_\alpha(t) \frac{\partial G^\alpha}{\partial y^A}(q^B(t), y^B(t), \dot{y}^b) \\ & + \frac{\partial \tilde{L}_M}{\partial y^A}(q^B(t), y^B(t), \dot{y}^b) \end{aligned} \quad (3.5)$$

$$\tilde{p}_\alpha(t) = -\tilde{p}_\alpha(t) \frac{\partial G^\alpha}{\partial \dot{y}^a}(q^B(t), y^B(t), \dot{y}^b) + \frac{\partial \tilde{L}_M}{\partial \dot{y}^a}(q^B(t), y^B(t), \dot{y}^b) \quad (3.6)$$

From Equations (3.5) and (3.6) we deduce

$$\frac{d}{dt} \left(\frac{\partial \tilde{L}_M}{\partial \dot{y}^a} - \tilde{p}_\alpha \frac{\partial G^\alpha}{\partial \dot{y}^a} \right) = -p_C X_a^C - \tilde{p}_\alpha \frac{\partial G^\alpha}{\partial y^a} + \frac{\partial \tilde{L}_M}{\partial y^a} \quad (3.7)$$

Differentiating with respect to time, replacing in the previous equality and using (3.4), we obtain the following system of equations

$$\begin{aligned} & \frac{d^2}{dt^2} \left(\frac{\partial \tilde{L}_M}{\partial \dot{y}^a} - \tilde{p}_\alpha \frac{\partial G^\alpha}{\partial \dot{y}^a} \right) - \frac{d}{dt} \left(\frac{\partial \tilde{L}_M}{\partial y^a} - \tilde{p}_\alpha \frac{\partial G^\alpha}{\partial y^a} \right) \\ & + X_a^A \left(\frac{\partial \tilde{L}_M}{\partial q^A} - \tilde{p}_\alpha \frac{\partial G^\alpha}{\partial q^A} \right) - p_C y^B \left[X_a^D \frac{\partial X_B^C}{\partial q^D} - X_B^D \frac{\partial X_a^C}{\partial q^D} \right] = 0 \end{aligned} \quad (3.8)$$

Let us consider the 2-form $\Omega_{W_1} = i_{W_1}^* \Omega$ where $i_{W_1} : W_1 \hookrightarrow W_0$ is the canonical inclusion.

Theorem 3.1. *The submanifold (W_1, Ω_{W_1}) is symplectic if and only if for any system of local coordinates $(q^A, y^A, \dot{y}^a, p_A, \tilde{p}_\alpha)$ on W_0*

$$\det(\mathcal{R}_{ab}) = \det \left(\frac{\partial^2 \tilde{L}_M}{\partial \dot{y}^a \partial \dot{y}^b} - \tilde{p}_\alpha \frac{\partial^2 G^\alpha}{\partial \dot{y}^a \partial \dot{y}^b} \right)_{m \times m} \neq 0 \text{ along } W_1.$$

Proof: Let us recall that Ω_{W_1} is symplectic if and only if $T_x W_1 \cap (T_x W_1)^\perp = 0 \quad \forall x \in W_1$, where

$$(T_x W_1)^\perp = \{v \in T_x W_0 / \Omega_{W_0}(x)(v, w) = 0, \text{ for all } w \in T_x W_1\}.$$

Suppose that (W_1, Ω_{W_1}) is symplectic and that

$$\lambda^a \mathcal{R}_{ab}(x) = 0 \text{ for some } \lambda^a \in \mathbb{R} \text{ and } x \in W_1.$$

Since

$$\lambda^b \mathcal{R}_{ab}(x) = \lambda^b d\varphi_a(x) \left(\frac{\partial}{\partial \dot{y}^b} \Big|_x \right) = 0,$$

then, $\lambda^b \frac{\partial}{\partial \dot{y}^b} \Big|_x \in T_x W_1$ but it is also in $T_x W_1^\perp$. This implies that $\lambda_b = 0$ for all b and that the matrix $(\mathcal{R}_{ab})$ is regular.

Now, suppose that the matrix $(\mathcal{R}_{ab})$ is regular. As we have observed

$$d\varphi_a(x) \left(\frac{\partial}{\partial \dot{y}^b} \Big|_x \right) = \mathcal{R}_{ab}(x)$$

and therefore, $\frac{\partial}{\partial \dot{y}^b} \Big|_x \notin T_x W_1$ and, in consequence,

$$T_x W_1 \oplus \text{span} \left\{ \frac{\partial}{\partial \dot{y}^b} \Big|_x \right\} = T_x W_0.$$

Now, let $Z \in T_x W_1 \cap (T_x W_1)^\perp$ with $x \in W_1$. It follows that

$$0 = i_Z \Omega_{W_0}(x) \left(\frac{\partial}{\partial \dot{y}^a} \Big|_x \right), \text{ for all } a \text{ and } i_Z \Omega_{W_0}(x)(\bar{Z}) = 0, \text{ for all } \bar{Z} \in T_x W_1$$

Then, $Z \in \ker \Omega_{W_0}(x)$. This implies that

$$Z = \lambda_b \frac{\partial}{\partial \dot{y}^b} \Big|_x$$

Since $Z \in T_x W_1$ then

$$0 = d\varphi_a(x)(Z) = d\varphi_a(x) \left(\lambda_b \frac{\partial}{\partial \dot{y}^b} \Big|_x \right) = \lambda_b \mathcal{R}_{ab}$$

and, consequently, $\lambda_b = 0$, for all b , and $Z = 0$. $\square$

Under the hypothesis of Theorem 3.1, we can rewrite the necessary conditions for optimality as an explicit system of differential equations where Equation (3.8) is replaced by

$$\frac{d^3 y^a}{dt^3} = \Gamma^a \left(q^A, y^A, \frac{dy^a}{dt}, \frac{d^2 y^a}{dt^2}, p_A, \tilde{p}_\alpha \right) \quad (3.9)$$

3.1. Example. [The Planar Rigid Body]

The configuration space for this system in $Q = \mathbb{R}^2 \times S^1$ and it can be considered as the simplest example in the category of rigid body dynamics. The three degrees of freedom describe the translations in $\mathbb{R}^2$ and the rotation about its center of mass. The configuration is given by the followings variables: θ describes the relative orientation the body reference frame with respect to the inertial reference frame. The vector (x, y) denotes the position of the center of mass measured with respect to the inertial reference frame. The lagrangian is of kinetical type

$$L = \frac{1}{2} \dot{q}^T \mathcal{G}(q) \dot{q}, \text{ where } \mathcal{G}(q) = \begin{pmatrix} m & 0 & 0 \\ 0 & m & 0 \\ 0 & 0 & J \end{pmatrix},$$

and where m is the mass of the body and J is its moment of inertia about the center of mass. If we assume that the body moves in a plane perpendicular to the direction of the gravitational forces being the potential energy zero. For the planar body, the control forces that we consider are applied to a point on the body with distance $h > 0$ from the center of mass, along the body x -axis (see [3] for more details about this example).

The equations of motion are

$$\begin{aligned} m\ddot{x} &= u_1 \cos \theta - u_2 \sin \theta \\ m\ddot{y} &= u_1 \sin \theta + u_2 \cos \theta \\ J\ddot{\theta} &= -hu_2 \end{aligned}$$

The control fields are

$$\begin{aligned} X_1 &= \frac{\cos \theta}{m} \frac{\partial}{\partial x} + \frac{\sin \theta}{m} \frac{\partial}{\partial y} \\ X_2 &= -\frac{\sin \theta}{m} \frac{\partial}{\partial x} + \frac{\cos \theta}{m} \frac{\partial}{\partial y} - \frac{h}{J} \frac{\partial}{\partial \theta}, \end{aligned}$$

and we complete the basis of vector fields with $X_3 = h \sin \theta \frac{\partial}{\partial x} - h \cos \theta \frac{\partial}{\partial y} - \frac{\partial}{\partial \theta}$

The nonzero structure functions are

$$\begin{aligned} \mathcal{C}_{12}^2 &= \frac{h}{mh^2 + J} = -\mathcal{C}_{21}^2, & \mathcal{C}_{12}^3 &= -\frac{h^2}{(mh^2 + J)J} = -\mathcal{C}_{21}^3 \\ \mathcal{C}_{23}^1 &= -\frac{mh^2 + J}{J} = -\mathcal{C}_{32}^1, & \mathcal{C}_{13}^2 &= \frac{J}{mh^2 + J} = -\mathcal{C}_{31}^2 \\ \mathcal{C}_{13}^3 &= -\frac{h}{mh^2 + J} = -\mathcal{C}_{31}^3 \end{aligned}$$

Taking the corresponding quasivelocities $\{y^1, y^2, y^3\}$, we have that

$$\begin{aligned} \dot{x} &= y^1 \frac{\cos \theta}{m} - y^2 \frac{\sin \theta}{m} + y^3 h \sin \theta \\ \dot{y} &= y^1 \frac{\sin \theta}{m} + y^2 \frac{\cos \theta}{m} - y^3 h \cos \theta \\ \dot{\theta} &= -y^2 \frac{h}{J} - y^3. \end{aligned}$$

The Lagrangian of this system is

$$l(x, y, \theta, y^1, y^2, y^3) = \frac{1}{2} \left[\frac{1}{m} (y^1)^2 + \frac{mh^2 + J}{mJ} (y^2)^2 + (mh^2 + J) (y^3)^2 \right],$$

then the Hamel equations with controls are:

$$\begin{aligned} u_1 &= \dot{y}^1 + \frac{h}{J} (y^2)^2 - hm (y^3)^2 + \frac{J - mh^2}{J} y^2 y^3 \\ u_2 &= \frac{J + mh^2}{J} \dot{y}^2 - \frac{h}{J} y^1 y^2 - y^1 y^3 \\ 0 &= (J + mh^2) \dot{y}^3 + \frac{h^2}{J} y^1 y^2 + h y^1 y^3. \end{aligned}$$

Consider the following cost functional

$$\mathcal{A} = \frac{1}{2} \int_0^T (u_1^2 + u_2^2) dt.$$

Following our formalism this optimal control problem is equivalent to the constrained second-order variational problem determined by:

$$\tilde{\mathcal{A}} = \int_0^T \tilde{L}(x, y, \theta, y^1, y^2, y^3, \dot{y}^1, \dot{y}^2, \dot{y}^3) dt$$

and the second-order constraint

$$\Phi(x, y, \theta, y^1, y^2, y^3, \dot{y}^1, \dot{y}^2, \dot{y}^3) = (J + mh^2) \dot{y}^3 + \frac{h^2}{J} y^1 y^2 + h y^1 y^3 = 0,$$

where

$$\begin{aligned} \tilde{L}(x, y, \theta, y^1, y^2, y^3, \dot{y}^1, \dot{y}^2, \dot{y}^3) &= \frac{1}{2} \left[\dot{y}^1 + \frac{h}{J} (y^2)^2 - hm (y^3)^2 + \frac{J - mh^2}{J} y^2 y^3 \right]^2 \\ &+ \frac{1}{2} \left[\frac{J + mh^2}{J} \dot{y}^2 - \frac{h}{J} y^1 y^2 - y^1 y^3 \right]^2 \end{aligned}$$

Now, we rewrite the second-order constraint in the form

$$\dot{y}^3 = -\frac{h^2}{(J + mh^2)J}y^1y^2 - \frac{h}{(J + mh^2)}y^1y^3.$$

Take now $W_0 = \mathcal{M} \times T^*(T(\mathbb{R}^2 \times \mathbb{S}^1))$ with coordinates $(x, y, \theta, y^1, y^2, y^3, \dot{y}^1, \dot{y}^2, p_1, p_2, p_3, \tilde{p}_1, \tilde{p}_2, \tilde{p}_3)$.

Now, the presymplectic 2-form Ω , the Hamiltonian $\tilde{H}$ and the primary constraints, φ_1, φ_2 , are:

$$\begin{aligned} \Omega &= dx \wedge dp_1 + dy \wedge dp_2 + d\theta \wedge dp_3 + dy^1 \wedge d\tilde{p}_1 + dy^2 \wedge d\tilde{p}_2 + dy^3 \wedge d\tilde{p}_3, \\ \tilde{H} &= p_1 \left[y^1 \frac{\cos \theta}{m} - y^2 \frac{\sin \theta}{m} + y^3 h \sin \theta \right] + p_2 \left[y^1 \frac{\sin \theta}{m} + y^2 \frac{\cos \theta}{m} - y^3 h \cos \theta \right] \\ &\quad - p_3 \left[y^2 \frac{h}{J} + y^3 \right] + \tilde{p}_1 \dot{y}^1 + \tilde{p}_2 \dot{y}^2 - \tilde{p}_3 \left(\frac{h^2}{(J + mh^2)J} y^1 y^2 + \frac{h}{(J + mh^2)} y^1 y^3 \right) \\ &\quad - \frac{1}{2} \left[\dot{y}^1 + \frac{h}{J} (y^2)^2 - hm(y^3)^2 + \frac{J - mh^2}{J} y^2 y^3 \right]^2 - \frac{1}{2} \left[\frac{J + mh^2}{J} \dot{y}^2 - \frac{h}{J} y^1 y^2 - y^1 y^3 \right]^2 \\ \varphi_1 &= \frac{\partial \tilde{H}}{\partial \dot{y}^1} = \tilde{p}_1 - \left[\dot{y}^1 + \frac{h}{J} (y^2)^2 - hm(y^3)^2 + \frac{J - mh^2}{J} y^2 y^3 \right] = 0, \\ \varphi_2 &= \tilde{p}_2 - \frac{J + mh^2}{J} \left[\frac{J + mh^2}{J} \dot{y}^2 - \frac{h}{J} y^1 y^2 - y^1 y^3 \right], \end{aligned}$$

i.e.,

$$\begin{aligned} \tilde{p}_1 &= \dot{y}^1 + \frac{h}{J} (y^2)^2 - hm(y^3)^2 + \frac{J - mh^2}{J} y^2 y^3 \\ \tilde{p}_2 &= \frac{J + mh^2}{J} \left[\frac{J + mh^2}{J} \dot{y}^2 - \frac{h}{J} y^1 y^2 - y^1 y^3 \right]. \end{aligned}$$

These constraints determine the submanifold W_1 . Applying the Theorem 3.1, we deduce that the 2-form Ω_{W_1} , restriction of Ω to W_1 , is symplectic since

$$\begin{pmatrix} \mathcal{R}_{11} & \mathcal{R}_{12} \\ \mathcal{R}_{21} & \mathcal{R}_{22} \end{pmatrix} = \begin{pmatrix} 1 & 0 \\ 0 & (J + mh^2)/J \end{pmatrix}$$

is regular.

Therefore, the algorithm stabilizes in the first constraint submanifold W_1 . Moreover, there exists a unique solution of the dynamics, a vector field X which satisfies $i_X \Omega_{W_1} = d\tilde{H}_{W_1}$. In consequence, we have a unique control input which extremizes the objective function $\mathcal{A}$. If we take the flow $F_t : W_1 \rightarrow W_1$ of the vector field X then we have that $F_t^* \Omega_{W_1} = \Omega_{W_1}$, then the evolution is symplectic preserving. Obviously, the hamiltonian function $\tilde{H}|_{W_1}$ is preserved by the solution of the optimal control problem, that is $\tilde{H}|_{W_1} \circ F_t = \tilde{H}|_{W_1}$. Both properties, symplecticity and preservation of energy, are important geometric invariants. In [4], we construct, using discrete variational calculus, numerical integrators which inherit some of the geometric properties of the optimal control problem (symplecticity, momentum preservation and a very good energy behavior).

REFERENCES

- [1] M. Barbero-Liñán, A. Echeverría Enríquez, D. Martín de Diego, M.C Muñoz-Lecanda and N. Román-Roy. Skinner-Rusk unified formalism for optimal control systems and applications. J. Phys. A: Math Theor. 40 (2007), 12071-12093.
- [2] A.M. Bloch: *Nonholonomic Mechanics and Control*, Interdisciplinary Applied Mathematics Series, 24, Springer-Verlag, New York (2003).
- [3] F. Bullo, A.D. Lewis. *Geometric control of mechanical systems: Modeling, Analysis, and Design for Simple Mechanical Control Systems*. Texts in Applied Mathematics, Springer Verlaeng, New York (2005).
- [4] L. Colombo, D. Martín de Diego and M. Zuccalli. Optimal Control for Underactuated Mechanical Systems: A Geometrical Approach. Journal Mathematical Physics (2010) (Acept.)

- [5] J. Cortés. *Geometric Control and Numerical Aspects of Nonholonomic Systems*, Lec. Notes in Math., 1793, Springer-Verlag, Berlin (2002).
- [6] M. Gotay, J. Nester. Presymplectic Lagrangian systems I. The constraint algorithm and the equivalence theorem, *Ann. I.H.P Phys. Theor.* 30, 129-142 (1979).
- [7] G. Hamel. Die Lagrange–Eulersche Gleichungen der Mechanik, *Z. Math. Phys.* 50, 1–57 (1904).
- [8] M. de León, J.C. Marrero, E. Martínez. Lagrangian submanifolds and dynamics on Lie algebroids, *J. Phys. A: Math. Gen.* 38 (2005), R241–R308.
- [9] J. I. Neimark, N. A. Fufaev. *Dynamics of Nonholonomic Systems*. Translations of Mathematical Monographs, AMS, 33 (1972).
- [10] R. Skinner, R. Rusk. Generalized Hamiltonian dynamics I. Formulation on $T^*Q \oplus TQ$. *J. Math. Phys.* 24 (11) (1983), 2589-2594.

L. COLOMBO: INSTITUTO DE CIENCIAS MATEMÁTICAS (CSIC-UAM-UC3M-UCM), SERRANO 123, 28006 MADRID, SPAIN AND DEPARTAMENTO DE MATEMÁTICA, UNIVERSIDAD NACIONAL DE LA PLATA, CALLE 50 Y 115, LA PLATA, BUENOS AIRES, ARGENTINA

E-mail address: leonardocolombo867@gmail.com

D. MARTÍN DE DIEGO: INSTITUTO DE CIENCIAS MATEMÁTICAS (CSIC-UAM-UC3M-UCM), SERRANO 123, 28006 MADRID, SPAIN

E-mail address: david.martin@icmat.es